







MONTAGGIO - ASSEMBLING

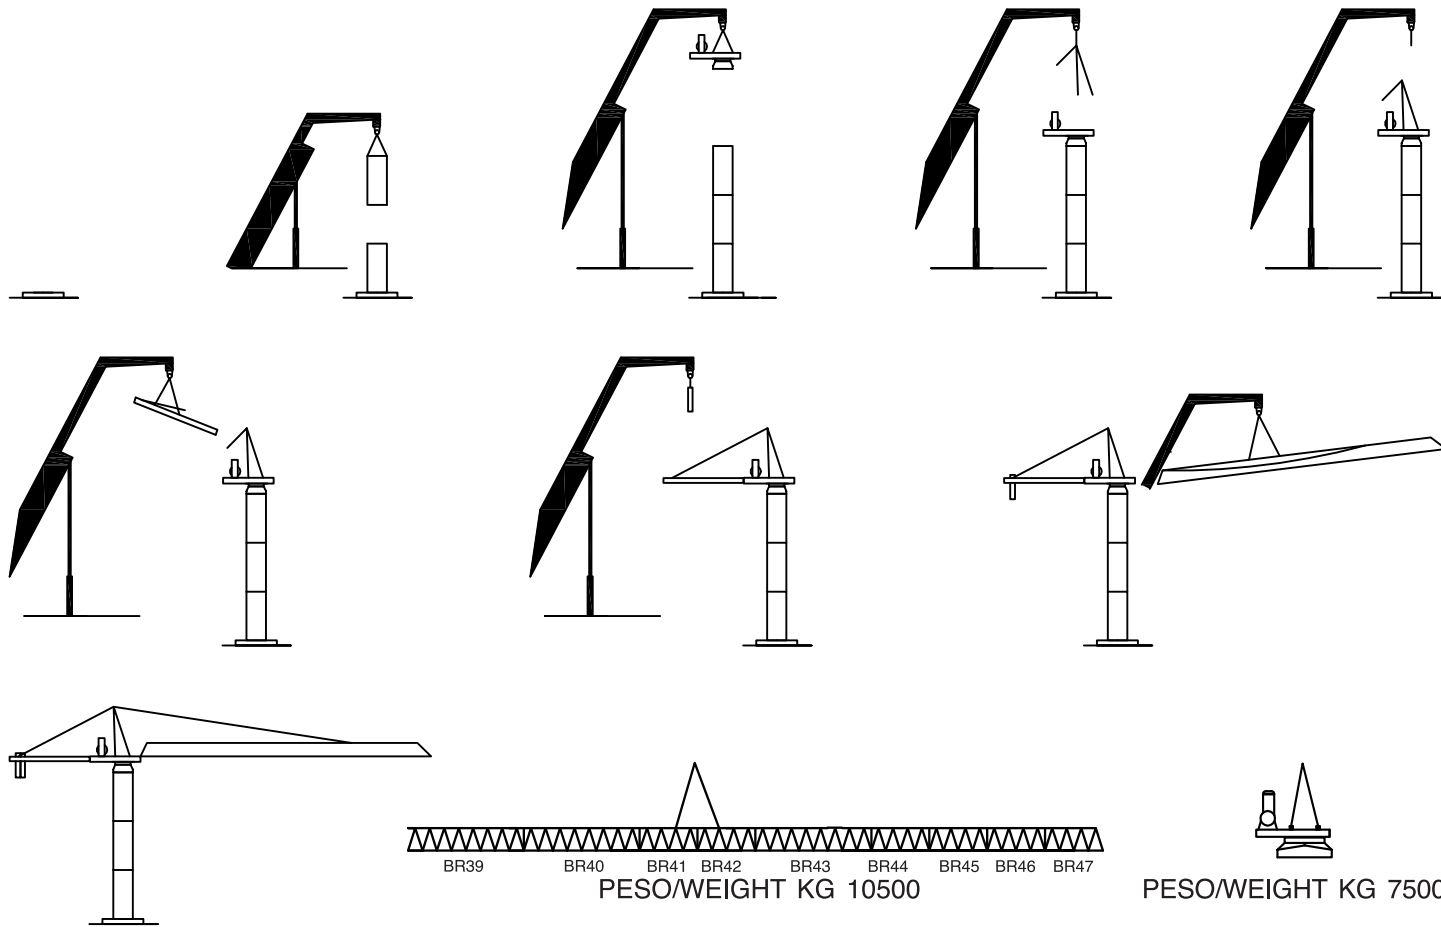

ALTEZZA LIBERA HEIGHT (mt)	DIMENSIONE TORRE (mt) / MAST DIMENSION				
	2,02 x 2,02 (mt)		2,50 x 2,50 (mt)	TELAIO INTERNO	TELAIO RACCORDO
	4,20	8,40	5,20	5,50	0,60
34,90	5	1		1	
39,10	6	1		1	
43,30	7	1		1	
47,50	8	1		1	
51,70	9	1		1	
55,90	10	1		1	
59,30	6		5	1	1
63,50	6		6	1	1
67,70	7		6	1	1
71,90	7		7	1	1
76,10	8		7	1	1




**MK220**

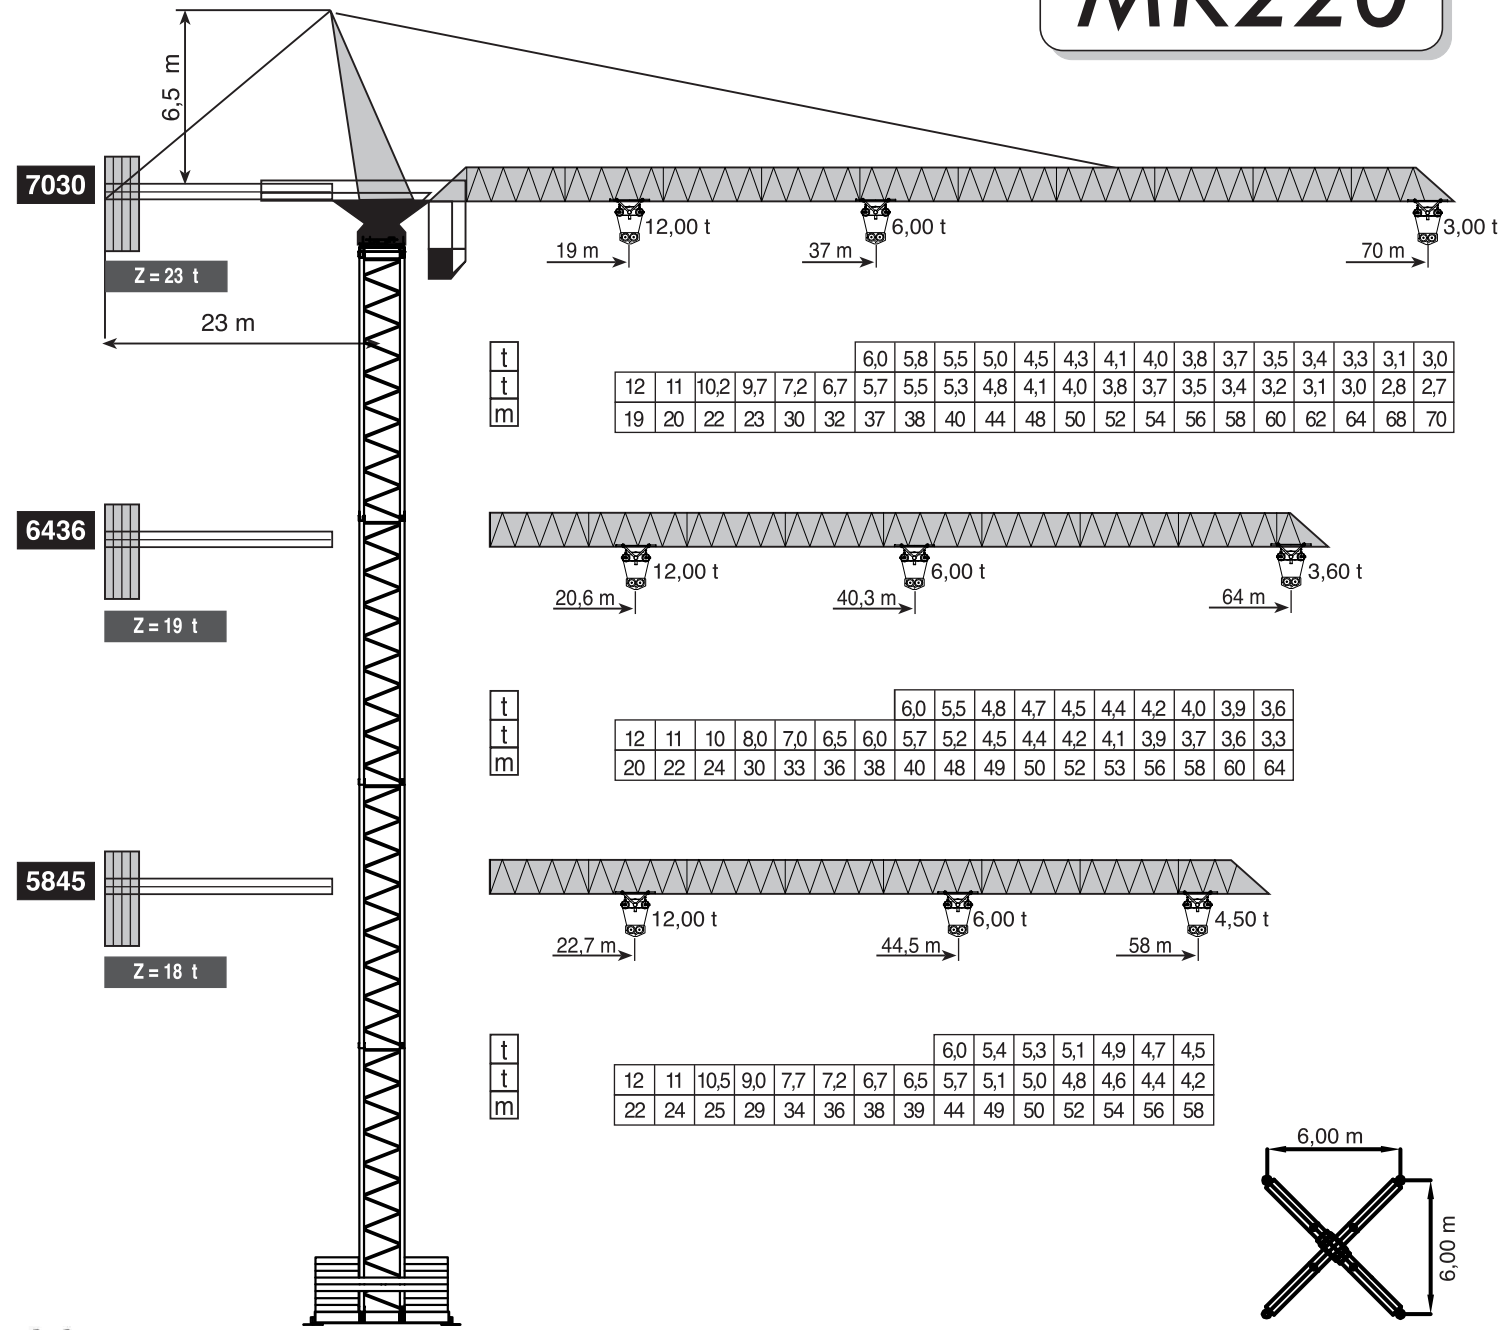

ALTEZZA MASSIMA CON ANCORAGGI MT. 200  
MT. 200 POSSIBLE MAX HEIGHT WITH ANCHORAGE FRAME

CE DIN 15018-H1B3 EN 14439:2009

DENOMINAZIONE DENOMINATION	SCHEMA/SKETCH	A (m)	B (m)	C (m)	PESO/WEIGHT (kg)
ELEMENTO BRACCIO BR39 JIB ELEMENT BR39		11,75	1,96	1,50	2370
ELEMENTO BRACCIO BR40 JIB ELEMENT BR40		11,75	1,96	1,50	2189
ELEMENTO BRACCIO BR41 JIB ELEMENT BR41		5,90	1,96	1,50	980
ELEMENTO BRACCIO BR42 JIB ELEMENT BR42		5,90	1,96	1,50	880
ELEMENTO BRACCIO BR43 JIB ELEMENT BR43		11,75	1,96	1,50	1800
ELEMENTO BRACCIO BR44 JIB ELEMENT BR44		5,90	1,96	1,50	760
ELEMENTO BRACCIO BR45 JIB ELEMENT BR45		5,90	1,96	1,50	560
ELEMENTO BRACCIO BR46 JIB ELEMENT BR46		5,90	1,96	1,50	480
ELEMENTO BRACCIO BR47 JIB ELEMENT BR247		5,90	1,96	1,50	340
GRUPPO ROTAZIONE SLEWING GROUP		3,90	2,90	2,30	7500
CUSPIDE SPIRE		8,60	1,60	1,60	2690
CONTROFRECCIA PARTE LUNGA COUNTERJIB LONG SIDE		11,30	1,60	0,50	2360
CONTROFRECCIA PARTE CORTA COUNTERJIB SHORT SIDE		5,35	1,60	0,50	1080
TELAIO BASE T3 BASE ELEMENT T3		8,59	2,04	2,04	3480
TELAIO INTERMEDIO INTERMEDIATE ELEMENT		4,42	2,04	2,04	2000
TELAIO INTERNO INNER ELEMENT		8,45	1,75	1,75	4240
TELAIO INTERMEDIO T3 INTERMEDIATE ELEMENT T3		5,40	2,60	2,60	2900
TELAIO BASE T1 BASE ELEMENT T1		8,59	2,04	2,04	3480
TELAIO BASE T3 BASE ELEMENT 3		8,69	2,08	2,08	3480

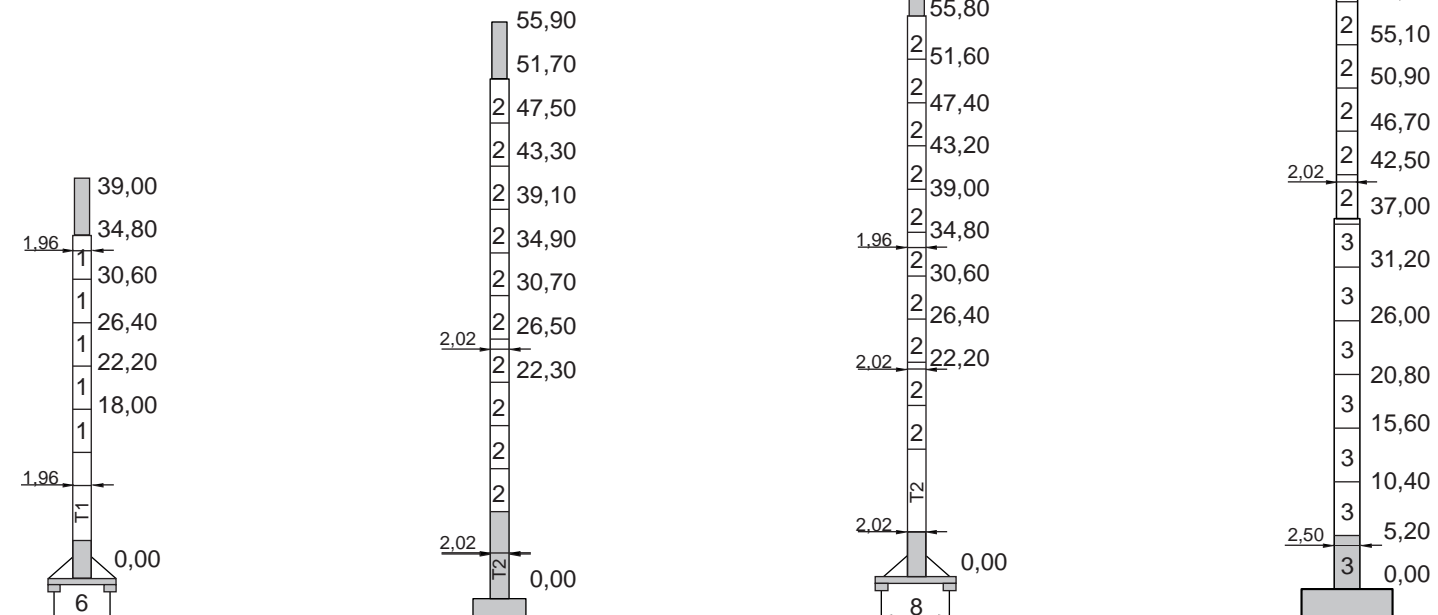
**ARGANI DI SOLLEVAMENTO - HOISTING WINCHES**

Hp	m/1'	Kg	Kg	Hp	m/1'	Kg	Kg
50	70/35	2500	5000	70	100/50	2250	4500
	45/22	3500	7000		66/33	3500	7000
	30/15	6000	12000		40/20	6000	12000
	16/8	6000	12000		16/8	6000	12000
	4/2	6000	12000		4/2	6000	12000

SENZA CARICO LA VELOCITÀ DI SOLLEVAMENTO AUMENTA DEL 20%

HOISTING SPEED INCREASE MORE THAN 20% WITHOUT LOAD

380/440V	ARGANO	POTENZA MAX	GRUPPO GEN.
50/60 HZ	WINCH	MAIN SUPPLY	GENER.
	50 HP	65 KVA	100 KVA
	70 HP	95 KVA	120 KVA

	4 KW	10/25/50 m/1'	R56
	3x65 Nm	0-0,8 rpm m/1'	SPR

- 1 — 1,96 x 1,96 mt
- 2 — 2,02 x 2,02 mt
- 3 — 2,50 x 2,50 mt

**VERSIONE CON TORRE MONOLITICA  
MONOLITIC TOWER VERSION**
